



# CP- UNC-VY10FL2C

1.3Mp HD Vandal IP IR Dome Camera - 20Mtr.

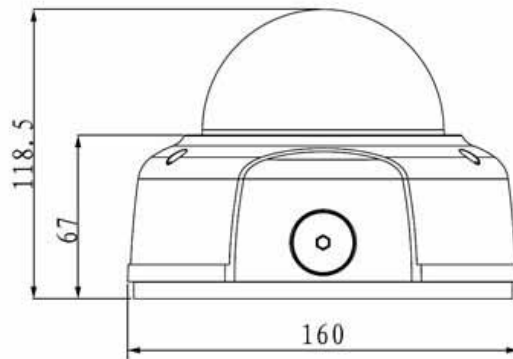

## Main Features

- 1/3" 1.3 Megapixel progressive scan SONY CCD
- H.264 & MJPEG dual-stream encoding
- Max 12/15fps@1.3M(1280×720)&25/30fps@720P(1280x720)
- Day/Night(ICR), 2DNR, Auto iris, AWB, AGC, BLC
- 2.8~12mm varifocal lens
- Built-in 2/1 alarm in/out
- Max. IR Distance: 20m
- Micro SD memory, IP66, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro



# CP- UNC-VY10FL2C

## 1.3Mp HD Vandal IP IR Dome Camera - 20Mtr.

Feature	Specification
Image Sensor	1/3" 1.3Megapixel PS CCD
Minimum Illumination	0.2lux/F1.4(color),0.01Lux/F1.4(B/W),0Lux(IR on)
Shutter Speed	Auto/Manual,1/50~1/10000s
White Balance	Auto
Gain Control(AGC)	Auto/Manual
Lens	2.8~12mm
Back Light Compensation	Off/BLC/HLC/DWDR
S/N Ratio	more than 50 dB
Video Compression	H.264/MJPEG
Video Streaming	Main Stream: 1.3M(1~12fps)/720P(1 ~ 25fps), Sub Stream: D1/CIF(1 ~ 25/30fps)
Resolution	1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480)/ CIF(352×288)
Video Output	1 channel BNC(1.0Vp-p, 75Ω)
Snapshot	Fastest 1fps JPEG capture
Privacy Mask	Up to 4 areas
ICR	Auto(ICR) / Color / B/W
Audio Input	1 Channel
Audio Compression	G.711a / G.711u(64kbps) / PCM(128kbps)
Audio Output	1 Channel
Alarm IN	2 Channel
Alarm Out	1 Channel
Interface	RJ-45 (10/100Base-T)
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP,SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Ver. 2.0
User Account	10 users
IR	IR Range Max upto 20m
Smart Phone	iPhone, iPad, Android, Windows Phone
Micro SD	SD, Max 32GB
Operating Temperature	-10°C~+60°C, 10%~90%
Power Source	DC12V/AC24V, PoE(802.3af)
Power Consumption	<10W
Weatherproof Standard	IK10 & IP66



**CP- UNC-VY10FL2C**

**1.3Mp HD Vandal IP IR Dome Camera - 20Mtr.**

Feature	Specification
Regulatory	CE, FCC and RoHS
Dimension	Φ160mm×118.5mm
Weight	1.25kg