

# Canon

Delighting You Always

SOUTH & SOUTHEAST ASIA  
REGIONAL HEADQUARTERS

Canon Singapore Pte. Ltd.  
1 HarbourFront Avenue  
#04-01 Keppel Bay Tower  
Singapore 098632  
Tel: 65-6799-8888  
Fax: 65-6799-8882

[www.canon-asia.com](http://www.canon-asia.com)

#### CANON OFFICES

**HONG KONG**  
Canon Hongkong Co., Ltd.  
Tel : 852-3191-2388  
Fax : 852-2369-3800  
[www.canon.com.hk](http://www.canon.com.hk)

**INDIA**  
Canon India Pvt. Ltd.  
Tel : 91-124-4160-000  
Fax : 91-124-4160-011  
[www.canon.co.in](http://www.canon.co.in)

**MALAYSIA**  
Canon Marketing (Malaysia) Sdn. Bhd.  
Tel : 603-7844-6000  
Fax : 603-7845-0505  
[www.canon.com.my](http://www.canon.com.my)

**PHILIPPINES**  
Canon Marketing (Philippines), Inc.  
Tel : 632-884-9000  
Fax : 632-894-4174  
[www.canon.com.ph](http://www.canon.com.ph)

**SINGAPORE**  
Canon Singapore Pte. Ltd.  
Tel : 65-6799-8888  
Fax : 65-6799-8882  
[www.canon.com.sg](http://www.canon.com.sg)

**THAILAND**  
Canon Marketing (Thailand) Co., Ltd.  
Tel : 66-2-3449-999  
Fax : 66-2-3449-967/68  
[www.canon.co.th](http://www.canon.co.th)

**VIETNAM**  
Canon Singapore Pte. Ltd.  
Ho Chi Minh City Representative  
Office & Showroom  
Tel : 84-8-8200-466  
Fax : 84-8-8200-477  
[www.canon.com.vn](http://www.canon.com.vn)

Hanoi City Representative Office  
Tel : 84-4-7711-677  
Fax : 84-4-7111-678  
[www.canon.com.vn](http://www.canon.com.vn)

#### CANON BUSINESS PARTNERS

**BANGLADESH**  
Flora Limited  
Tel : 880-2-7162742-46  
Fax : 880-2-9550030

**BRUNEI**  
Interhouse Company  
Tel: 673-2-6530-01  
Fax: 673-2-6530-03

**CAMBODIA**  
i-Click (Cambodia) Pte. Ltd.  
Tel : 855-23-966-638  
Fax : 855-23-996-639

Royal Cambodia Co., Ltd  
Tel : 855-23-4289-55  
Fax : 855-23-7229-61

**INDONESIA**  
P.T. Samafitro  
Tel : 62-21-3455-521  
Fax : 62-21-3844-271

**MALDIVES**  
SIMDI Company (Pvt) Ltd.  
Tel : 960-3334-421  
Fax : 960-3334-424

**MYANMAR**  
Myanmar Golden Rock  
International Co., Ltd.  
Tel : 95-1-202092/3/4  
Fax : 95-1-202079

**NEPAL**  
International Electronics  
Concern (P) Ltd.  
Tel : 977-1-4421-991  
Fax : 977-1-4421-909

**PAKISTAN**  
Shirazi Trading Co. (Pvt.) Ltd.  
Tel : 9221-32417659  
Fax : 9221-32417747

**SRI LANKA**  
Metropolitan Communications (Pvt) Ltd.  
Tel : 94-11-2437-797  
Fax : 94-11-2448-980



**Canon**  
Delighting You Always

## FAX-L170

# UPGRADE YOUR EFFICIENCY



- > Print: 18ppm (A4)
- > 512-pages fax reception memory
- > **30-sheet Auto Document Feeder**
- > 150-sheets paper cassette
- > Handset included
- > Low-power consumption in Sleep Mode

0163W272

Canon Singapore Pte. Ltd. 2012 – Printed in Singapore

Dealer's Stamp




Business *Can* be simple

# FAX-L170

Meet the new Canon FAX-L170. Combining fast laser printing, reliable fax performance, and ultra-low energy consumption, this compact device promises feature-rich functionality and incredible cost-savings. Set your expectations higher than ever before with the Canon FAX-L170.

## PRINT AND COPY PRODUCTIVITY

Not just a fax machine, the FAX-L170 is also a fast 18 pages-per-minute (ppm) desktop printer. Ultra-Fast Rendering (UFR II LT) printing language and Canon's unique load balancing architecture reduces reliance on device memory, while On-Demand Fixing technology ensures fast warm-up and recovery times.

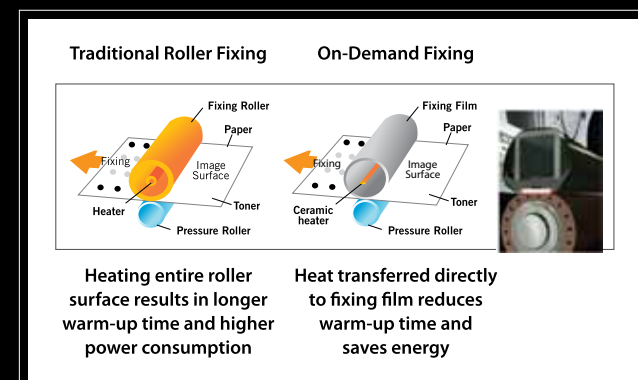

And with the 30-sheet Auto Document Feeder (ADF), users can also make copies of multi-page document originals at up-to 11.8 copies per minute (cpm).

## EFFORTLESS EASE-OF-USE

An evenly-weighted handset integrates seamlessly with the device body, maintaining its unique compact shape. With a generous 5-line LCD display that also makes it easy to set up the device for the first time, the FAX-L170 is designed for user-friendly operation inside-out.



## MINIMAL MAINTENANCE

The FAX-L170 is virtually maintenance-free, thanks to Canon's All-In-One Toner Cartridge 328.



## USEFUL FAX FEATURES

Reliable fax performance is assured with 512-pages fax reception memory, and a 5-minute memory backup feature to prevent accidental data loss. 30-one-touch dials are also available for convenient access to frequent fax destinations.



## YOUR PARTNER IN GREEN SAVINGS

The FAX-L170 can be relied on for great cost-savings even when left powered-on all-day. The device drops into Sleep Mode after a period of inactivity, consuming just 1.5W.



The device also complies with the EU RoHS\* directive by eliminating hazardous substances such as mercury, cadmium, lead and hexavalent chromium.



\*Restriction of the use of certain Hazardous Substances in electrical and electronic equipment

## QUALITY TONER ENGINEERING

Adopting a spherical particle shape, MS-Toner achieves improvements in image processing performance, precise character and overall image quality. MS-Toner also improves melting performance, which assists On-Demand Fixing technology through the use of less heat and pressure.



# FAX-L170 SPECIFICATIONS

PRINT	
Printing Method	Monochrome Laser
Print Speed (A4/Letter)	18/19ppm (pages per minute)
Print Resolution	Up to 600 x 600dpi 1200 (equivalent) x 600dpi
Warm-up Time (From Power On)	14 secs or less
First Printout Time (FPOT)	Approx. 7.8 secs (A4), 7.7 secs (LTR)
Recovery Time (From Sleep Mode)	Approx. 3.5 secs.
Print Language/Emulation	UFR II LT
Print Margins	top/5 mm, bottom/6mm, left/5mm, right/5 mm (Other sizes than Envelope) 10 mm-top, bottom, left and right (Envelope)
Print Features	Watermark, Page Composer, Toner Saver
COPY	
Copy Speed	LTR: 12.4cpm (copies per minute) A4: 11.8cpm (copies per minute)
Copy Resolution	600 x 600dpi
First Copy Time (FCOT)	Approx. 22.3 secs (A4), 21.3 secs (LTR)
Maximum Number of Copies	Up to 99 copies
Reduce/Enlargement	50 - 200% in 1% increments
Copy Features	Density Adjustment, Toner Saver
FAX	
Modem Speed	Up to 33.6Kbps
Fax Resolution	Up to 200 x 400dpi
Compression Method	MH, MR, MMR
Memory Capacity * 1	Up to 512 pages
One-Touch Dial	30 dials
Speed Dial (One Touch + Coded dials)	Up to 130 dials
Group dials / Destinations	Max. 129 dials / Max. 129 destinations
Sequential broadcast	Max. 140 destinations
Receive Mode	FAX Only, Manual, Answering, Fax/Tel Auto Switch
Memory Backup	Yes, 5 minutes
FAX Features	FAX Forwarding, Dual Access, Remote Reception, PC FAX (TX only), DRPD, ECM, Auto Redial, Fax Activity Reports, Fax Activity Result Reports, Fax Activity Management Reports

\*1 Based on ITU-T #1 Chart (standard mode)

\*2 Drivers for Mac OS and Windows 64-bit OS can be downloaded from [www.canon-asia.com](http://www.canon-asia.com) when available

\*3 Linux supports printing only. Print driver can be downloaded from [www.canon-asia.com](http://www.canon-asia.com) when available

PAPER HANDLING	
Auto Document Feeder	30 sheets (80g/m <sup>2</sup> or less)
Available Paper Size for ADF	A4, B5, A5, B6, Letter, Legal, Statement, Min. 127 x 139.7mm to Max. 216 x 356mm
Paper Input	Plain Paper (60-80g/m <sup>2</sup> ): 150-sheet cassette
Paper Output	100 sheets (face down)
Paper Sizes	A4, B5, A5, LGL, LTR, STMT, EXE, OFFICIO, B-OFFICIO, M-OFFICIO, GLTR, GLGL, FLS, 16K, Postcard, Postcard without folding line, Tetrahedral Postcard, Envelope: COM10, Monarch, C5, DL, Custom (Min. 76.2 x 127mm to Max. 216 x 356mm)
Paper Types	Plain, Heavy, Recycled, Transparency, Label, Envelope
Paper Weight	60 to 163g/m <sup>2</sup>
CONNECTIVITY AND SOFTWARE	
Standard Interface(s)	USB 2.0 High Speed
Operating System Compatibility	Windows 7 (32/64bit* 2), Windows Vista (32/64bit* 2), Windows XP (32/64bit* 2)/ Windows 2000 Mac OS X 10.4.9* 2 & up, Linux* 3
Software Included	Printer Driver, Fax Driver
GENERAL SPECIFICATIONS	
Memory	64MB (max.)
LCD Display	5-line BW LCD
Dimensions (W x D x H)	372 x 303 x 303mm (cassette closed) 372 x 400 x 303mm (cassette opened)
Weight	8.2kg (without cartridge) 8.8kg (with cartridge)
Power Consumption	Max: 1020W or less (max.) During Operation: Approx. 400W (in Copying) During Standby: Approx. 10W During Sleep: Approx. 1.5W
TEC (Typical Electricity Consumption)	0.6kWh/W
Noise Levels	During Operation: Sound Pressure Level (Bystander's position): 53dB (reference value) Sound Power Level: 6.5B or less During Standby: Sound Pressure Level (Bystander's position): Inaudible* 4 (reference value) Sound Power Level: 4.3B or less
Operating Environment	Temperature: 10 to 30°C Humidity: 20% to 80% RH (no condensation)
Power Requirements	AC 220 to 240V: 50/60Hz
Toner Cartridge* 5	Cartridge 328: 2,100 pages (Bundled cartridge: 1,000 pages)
Monthly Duty Cycle* 6	Up to 8,000 pages

\*4 "Inaudible" means each Sound pressure level at bystander's position is less than the absolute criterion value about background noise of ISO 7779.

\*5 Toner cartridge yield in accordance with ISO/IEC 19752

\*6 Monthly Duty Cycle value provides a means for comparison of product robustness in relation to other Canon Laser Devices, and does not refer to actual maximum image output per month.